



## Popular W-Series Hydraulic Assemblies



Quick-ship W assemblies help you meet tight deadlines and avoid lengthy made-to-order lead times.

### THREE EASY STEPS TO CREATE YOUR ORDER Mix-and-Match

Combine your preferred assembly with a hydraulic filter and indicator to meet your performance requirements.

#### 1. Choose the Assembly

Select the specific part numbers needed for both the head and the housing. Indicator ports are machined into every head.

#### 2. Choose the Filter

Use the **Donaldson Hydraulic Filtration Product Guide (F112100)** as a reference guide for filter selection.

Refer to the filter choice tables found in the catalog to determine a specific part number to meet your performance, ISO cleanliness and pressure drop requirements.

The hydraulic catalog is available online at [DonaldsonFilters.com](http://DonaldsonFilters.com).

#### 3. Choose the Indicator

Indicators are optional but recommended to help monitor the condition of the filter and maintain the proper ISO cleanliness level for your application.



### High-Performance DT Cartridge Filters

Donaldson DT filters provide superior hydraulic system protection.

#### Premium Uptime Protection

- Better protection from particles and contaminant
- Extends filter life with Donaldson DT Synteq™ media technology





## W023 Spin-On Assembly



Donaldson Part Number	Port Size	Housing Length	Bypass Pressure Setting	Seal Material
<b>Max Flow:</b> 60 gpm (227 lpm) <b>Max Pressure:</b> 150 (1034 kPa) / 10.3 bar <ul style="list-style-type: none"> <li>Gray iron head construction</li> <li>Excellent choice for use in high corrosion environments</li> </ul>				
<b>Head (includes head only)</b>				
<b>P574241</b>	SAE-20 O-ring	NA	<b>50 psi</b> (345 kPa) / 3.45 bar	Buna-N
<b>P575930</b>	1-1/4" NPT	NA	None	Buna-N

## WL15 In-Tank Assembly



<b>Max Flow:</b> 50 gpm (190 lpm) <b>Max Pressure:</b> 200 (1379 kPa) / 13.8 bar <ul style="list-style-type: none"> <li>Meets HF4 automotive standard</li> <li>Optional secondary inlet port offers the use of a second return line</li> </ul>				
<b>Housing Assembly (includes head and bowl; does not include the 12" extension tube)</b>				
<b>P574231</b>	(1) SAE-24 O-ring	9"	<b>25 psi</b> (172 kPa) / 1.72 bar	Buna-N
<b>P574223</b>	(1) SAE-24 O-ring	9"	<b>50 psi</b> (345 kPa) / 3.45 bar	Buna-N
<b>P574224</b>	(1) SAE-24 O-ring	9" with 12" extension	<b>25 psi</b> (172 kPa) / 1.72 bar	Buna-N
<b>P574225</b>	(2) 1½" SAE 4-Bolt Flange Code 61	9" with 12" extension	<b>50 psi</b> (345 kPa) / 3.45 bar	Buna-N

Head/Bowl/Housing Seal Kits		
Series	Part No.	Material
WL15/16	X011140	Buna
	X011141	Viton

## WL16 In-Tank Assembly



<b>Max Flow:</b> 200 gpm (757 lpm) <b>Max Pressure:</b> 200 (1379 kPa) / 13.8 bar <ul style="list-style-type: none"> <li>Meets HF4 automotive standard</li> <li>Top or side reservoir mounting options – with optional anti-flow back valve (side mounting only)</li> </ul>				
<b>Housing Assemblies (includes head and bowl)</b>				
<b>P574232</b>	(2) SAE-24 O-ring	9"	<b>25 psi</b> (172 kPa) / 1.72 bar	Buna-N
<b>P574233</b>		18"		
<b>P574234</b>		27"		
<b>P574235</b>	(2) 1½" SAE 4-Bolt Flange Code 61	18"	<b>50 psi</b> (345 kPa) / 3.45 bar	
<b>P574236</b>	(1) 1½" SAE 4-Bolt Flange Code 61	18"		
<b>P574237</b>	(1) 1½" SAE 4-Bolt Flange Code 61	27"		
<b>P575922</b>	(2) SAE-24 O-ring	18"		

# Medium Pressure Filtration



## W061 In-Line Assembly



Donaldson Part Number	Port Size	Housing Length	Bypass Pressure Setting	Seal Material
<b>Max Flow:</b> 100 gpm (379 lpm) <b>Max Pressure:</b> 600 (4137 kPa) / 41.3 bar <ul style="list-style-type: none"> <li>Meets HF3 automotive standard</li> <li>Cast iron head with steel housing construction</li> <li>Bleed plug in head</li> </ul>				
<b>Heads</b> (bowl ordered separately)				
<b>P574242</b>	SAE-12 O-ring	NA	<b>50 psi</b> (345 kPa) / 3.45 bar	Buna-N
<b>P574243</b>	SAE-16 O-ring			
<b>P575929</b>	SAE-16 O-ring		<b>25 psi</b> (172 kPa) / 1.72 bar	Viton
<b>Housings</b> (head ordered separately)				
<b>X011115</b>	NA	4"	NA	Buna-N
<b>X011111</b>		8"		
<b>X011117</b>		13"		

**Filter Selection**  
Refer to page 110 of the Hydraulic Filtration Product Guide (F112100) for filter choices.

Head/Bowl/Housing Seal Kits		
Series	Part No.	Material
W061	X011160	Buna
	X011161	Viton

## W041 In-Line Assembly



<b>Max Flow:</b> 300 gpm (1136 lpm) <b>Max Pressure:</b> 500 (3450 kPa) / 34.5 bar <ul style="list-style-type: none"> <li>Base-mounted assembly</li> <li>All aluminum head with plated steel housing and cast iron cover</li> <li>Two drain plugs in base; bleed/fill plug in head</li> </ul>				
<b>Housing Assemblies</b> (includes head and bowl)				
<b>P574218</b>	2" SAE 4-Bolt Flange Code 61	16"	<b>50 psi</b> (345 kPa) / 3.45 bar	Viton
<b>P574219</b>	2½" SAE 4-Bolt Flange Code 61	39"		
<b>P575920</b>	2" SAE 4-Bolt Flange Code 61	39"		
<b>P575921</b>	2½" SAE 4-Bolt Flange Code 61	16"		

**Filter Selection**  
Refer to page 118 of the Hydraulic Filtration Product Guide (F112100) for filter choices.

Head/Bowl/Housing Seal Kits		
Series	Part No.	Material
W041	X011156	Buna
	X011157	Viton



## W440 In-Line Assembly



Donaldson Part Number	Port Size	Housing Length	Bypass Pressure Setting	Seal Material
<b>Max Flow:</b> 20 gpm (75 lpm) <b>Max Pressure:</b> 4000 (27580 kPa) / 275.8 bar <ul style="list-style-type: none"> <li>• Meets HF2 automotive standard</li> <li>• Positive sealing poppet bypass for reliability and zero leakage</li> <li>• Compact design for use with servo or proportional valve</li> <li>• Cast iron head</li> <li>• Steel housing with drain plug</li> </ul>				
Heads (bowl ordered separately)				
<b>P574248</b>	SAE-12 O-ring	NA	<b>50 psi</b> (345 kPa) / 3.45 bar	Buna-N
<b>P574249</b>	Manifold Mount			
<b>P574250</b>	Manifold Mount		No Bypass	Viton
Housings (head ordered separately)				
<b>X011125</b>	NA	4"	NA	Buna-N
<b>X011126</b>		8"		

**Filter Selection**  
Refer to page 134 of the Hydraulic Filtration Product Guide (F112100) for filter choices.

### Head/Bowl/Housing Seal Kits

Series	Part No.	Material
W440	X011172	Buna
	X011173	Viton

## W350 In-Line Assembly



<b>Max Flow:</b> 50 gpm (190 lpm) <b>Max Pressure:</b> 3000 (20685 kPa) / 206.9 bar <ul style="list-style-type: none"> <li>• T-type ported design meets HF3 automotive standard</li> <li>• Cast iron head with bleed plug</li> <li>• Steel housing with drain plug</li> </ul>				
Heads (bowl ordered separately)				
<b>P574245</b>	SAE-16 O-ring	NA	<b>50 psi</b> (345 kPa) / 3.45 bar	Buna-N
<b>P574246</b>				
<b>P574247</b>			No Bypass	
Housings (head ordered separately)				
<b>X011556</b>	NA	4"	NA	Buna-N
<b>X011558</b>		8"		

**Filter Selection**  
Refer to page 144 of the Hydraulic Filtration Product Guide (F112100) for filter choices.

### Head/Bowl/Housing Seal Kits

Series	Part No.	Material
W350	X011170	Buna
	X011171	Viton



## W451 In-Line Assembly



Donaldson Part Number	Port Size	Housing Length	Bypass Pressure Setting	Seal Material	
<b>Max Flow:</b> 150 gpm (568 lpm) <b>Max Pressure:</b> 4500 (31027 kPa) / 310 bar • Meets HF4 automotive standard • Cast iron base and cover with bleed/fill plug • Steel cylinder with drain plug					
<b>Housing Assemblies (includes head and bowl)</b>					
P574220	SAE-24 O-ring	9"	50 psi (345 kPa) / 3.45 bar	Buna-N	
P574221		18"			
P574222		27"			
P574223	1½" SAE 4-Bolt Flange Code 61	18"	90 psi (620 kPa) / 6.21 bar		
P574224		27"			
P574225		1½" SAE 4-Bolt Flange Code 62	18"		50 psi (345 kPa) / 3.45 bar
P574226	Manifold Mount	27"			
P574227		9"	NA		
P574228		18"			
P574229	27"				
P574230	9"				
P575915	SAE-24 O-ring	18"		NA	Viton
P575916		27"			
P575917		9"			
P575918	1½" SAE 4-Bolt Flange Code 61	18"	90 psi (620 kPa) / 6.21 bar		
P575919		9"			

**Filter Selection**  
Refer to page 168 of the Hydraulic Filtration Product Guide (F112100) for filter choices.

### Head/Bowl/Housing Seal Kits

Series	Part No.	Material
W451	X011174	Buna
	X011175	Viton

## W620 In-Line Assembly



<b>Max Flow:</b> 150 gpm (568 lpm) <b>Max Pressure:</b> 6000 (41370 kPa) / 413.8 bar • Meets HF3 automotive standard • Cast iron head and steel housing				
<b>Heads (bowl ordered separately)</b>				
P574252	SAE-16 O-ring	NA	50 psi (345 kPa) / 3.45 bar	Buna-N
P574253	SAE-24 O-ring			
P574254	1½" SAE 4-Bolt Flange Code 62			
P575931	1¼" SAE 4-Bolt Flange Code 62	NA	90 psi (620 kPa) / 6.21 bar	Viton
P575932			50 psi (345 kPa) / 3.45 bar	
P575933	SAE-16 O-ring		90 psi (620 kPa) / 6.21 bar	
P575934	SAE-20 O-ring		50 psi (345 kPa) / 3.45 bar	
P575935			90 psi (620 kPa) / 6.21 bar	
<b>Housings (head ordered separately)</b>				
X011557	NA	4"	NA	Buna-N
X011559		8"		
X011554		13"		
X011555		16"		

**Filter Selection**  
Refer to page 172 of the Hydraulic Filtration Product Guide (F112100) for filter choices.

### Head/Bowl/Housing Seal Kits

Series	Part No.	Material
W620	X011182	Buna
	X011183	Viton



## Select an Indicator to Suit your Requirements

Select an indicator to help monitor the condition of the filter and maintain the proper ISO level for your application.

### Electrical



Donaldson Part Number	Indicator Pressure Setting	Connector Style	Seal Material	Thermal Lockout	Surge Control
<a href="#">P572355</a>	<b>15 psi</b> (103 kPa) /1.03 bar	Hirschmann	Buna-N	No	No
<a href="#">P572359</a>	<b>35 psi</b> (241 kPa) /2.41 bar	Hirschmann	Buna-N	No	No
<a href="#">P572361</a>	<b>35 psi</b> (241 kPa) /2.41 bar	Brad Harrison	Buna-N	No	No
<a href="#">P572369</a>	<b>70 psi</b> (482 kPa) /4.83 bar	Hirschmann	Buna-N	No	No

### Visual



<a href="#">P572345</a>	<b>15 psi</b> (103 kPa) /1.03 bar	None	Buna-N	No	No
<a href="#">P572347</a>	<b>35 psi</b> (241 kPa) /2.41 bar	None	Buna-N	No	No
<a href="#">P569636</a>	<b>35 psi</b> (241 kPa) /2.41 bar	None	Viton	No	No
<a href="#">P572348</a>	<b>35 psi</b> (241 kPa) /2.41 bar	None	Buna-N	Yes	Yes
<a href="#">P567456</a>	<b>35 psi</b> (241 kPa) /2.41 bar	None	Viton	Yes	Yes
<a href="#">P572319</a>	<b>70 psi</b> (482 kPa) /4.83 bar	None	Buna-N	Yes	Yes
<a href="#">P567457</a>	<b>70 psi</b> (482 kPa) /4.83 bar	None	Viton	Yes	Yes
<a href="#">P569637</a>	<b>70 psi</b> (482 kPa) /4.83 bar	None	Viton	No	No
<a href="#">P572353</a>	<b>100 psi</b> (689 kPa) /6.89 bar	None	Buna-N	Yes	Yes
<a href="#">P572354</a>	<b>100 psi</b> (689 kPa) /6.89 bar	None	Viton	Yes	Yes

Brad Harrison® is a registered trademark of Woodhead Industries, Inc.

Hirschmann® is a registered trademark of Richard Hirschmann of America Inc.

Buna-N® and Viton® are registered trademarks of E. I. DuPont de Nemours and Co.



## Visual / Electrical



Donaldson Part Number	Indicator Pressure Setting	Connector Style	Seal Material	Thermal Lockout	Surge Control
<b>P572323</b>	<b>15 psi</b> (103 kPa) /1.03 bar	Hirschmann	Buna-N	No	No
<b>P572342</b>	<b>15 psi</b> (103 kPa) /1.03 bar	3-wire flying leads	Buna-N	No	No
<b>P572327</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Hirschmann	Buna-N	No	No
<b>P572329</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Brad Harrison	Buna-N	No	No
<b>P569638</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Hirschmann	Viton	Yes	No
<b>P572384</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Hirschmann	Buna-N	Yes	Yes
<b>P567458</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Hirschmann	Viton	Yes	Yes
<b>P572385</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Brad Harrison	Buna-N	Yes	Yes
<b>P572349</b>	<b>35 psi</b> (241 kPa) /2.41 bar	3-wire flying leads	Buna-N	No	No
<b>P572320</b>	<b>70 psi</b> (482 kPa) /4.83 bar	Hirschmann	Buna-N	Yes	Yes
<b>P567459</b>	<b>70 psi</b> (482 kPa) /4.83 bar	Brad Harrison	Buna-N	Yes	Yes
<b>P572373</b>	<b>70 psi</b> (482 kPa) /4.83 bar	Hirschmann	Buna-N	Yes	No
<b>P569639</b>	<b>70 psi</b> (482 kPa) /4.83 bar	Hirschmann	Viton	Yes	No
<b>P572387</b>	<b>100 psi</b> (689 kPa) /6.89 bar	Hirschmann	Buna-N	Yes	Yes

## Electrical

<b>X011061</b>	<b>18 psi</b> (124 kPa) /1.24 bar	Hirschmann	Buna-N	No	No
<b>X011064</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Hirschmann	Buna-N	No	No
<b>X011065</b>	<b>18 psi</b> (124 kPa) /1.24 bar	Brad Harrison	Buna-N	No	No
<b>X011066</b>	<b>35 psi</b> (241 kPa) /2.41 bar	Brad Harrison	Buna-N	No	No

## Pressure Gauge

<b>X011059</b>	<b>25 psi</b> (172 kPa) /1.72 bar
<b>X011060</b>	<b>50 psi</b> (345 kPa) /3.45 bar



## How to Select a Filter for your W Assembly

Use the **Hydraulic Filtration Product Guide (F112100)** as a reference tool.

Refer to the filter choice tables found in the hydraulic catalog to determine a specific part number that will meet your performance, ISO cleanliness and pressure drop requirements.

# High-Performance DT Filters Provide Superior System Protection


### Premium Uptime Protection

Every hydraulic system has suspended particles in its fluid. Contaminants grind and wear at the surface of moving parts, introducing even more particles into the system. These contaminants cause more than 70% of all hydraulic system downtime.


Donaldson high-performance DT cartridge filters provide better protection from the particles and contaminants that reduce the effectiveness of lubricant and hydraulic fluid. Using Donaldson DT Synteq™ media technology, these filters extend filter life, allow higher initial cleanliness and provide superior system protection.



### Dirt-Holding Capacity Improvement

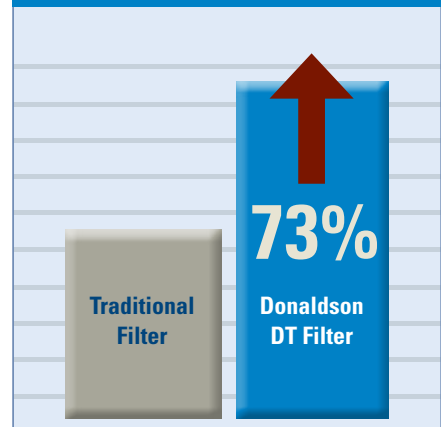

### Pressure Drop Improvement

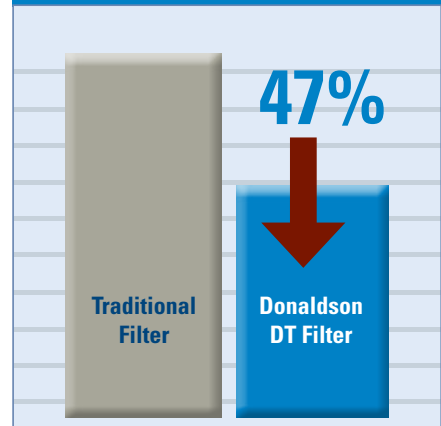

**Donaldson DT filters are stocked and ready to ship!**



Donaldson Company, Inc.  
PO Box 1299  
Minneapolis, MN  
55440-1299  
[www.donaldson.com](http://www.donaldson.com)  
[www.donaldsonfilters.com](http://www.donaldsonfilters.com)

North America 800-374-1374  
Mexico +52-449-910-6150  
Latin Am. & Caribbean +52-449-910-6150  
Brazil +55-11-4894-6340  
Europe +32-16-38-3811  
South Africa +27-11-997-6000

South East Asia 65-6311-7373  
Greater China 852-2405-8388  
Japan 81-42-540-4112  
Australia 61-02-4350-2033  
Korea 82-2-517-3333  
India +91-124-2290060

Brochure No. F111410 ENG (3/15)  
©2015 Donaldson Company, Inc. All rights reserved.  
Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice. Printed in the U.S.A.

